

EFD CORES

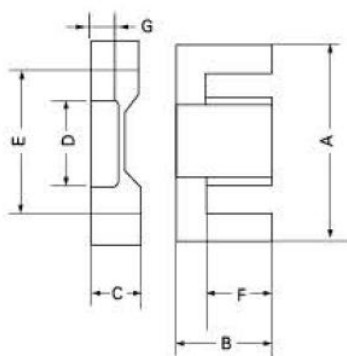


Fig.1




Fig.2

[illegible]

磁环高度可根据客户要求调整

The height can be adjusted as customers' requirement

型号 Type	有效参数 Effective parameter				AL 值 AL(nH/N2)		
	C1 (mm-1)	Le (mm)	Ae (mm2)	Ve (mm3)	GH5	GH7	GH10
EFD1515	1.99	29.9	15.01	448.82		1300±25%	2100 MIN
EFD20D	1.2	43.32	35.96	1558.38	3000±25%	3250±25%	4300 MIN
EFD25D	0.82	54.16	65.72	3559.98	3000±25%	4000±25%	5600 MIN

注意：A L 值

- ◆ 单位：nH/N²
- ◆ 测量条件：1kHz、0.3V、100TS、23℃
- ◆ 非镜面研磨公差：± 25%
- ◆ 镜面研磨为公差为最小值 :MIN

以上产品的材质，可以根据客户的要求进行调整，我司可以供应 GP4/GP44/GP47/GP95 等材质。